## Powered Tilter With Du

## Hydraulica 1000-B [1000kg]

The Hydraulica 1000-B is the newer version of our popular Hydraulica 1000-A model. The new model is also a versatile ten to fourteen pad lifter that comes with two extension arms as standard, increasing capacity from 750kg to 1000kg and offering additional stabilisation of larger loads.

This newer version also comes with two hydraulic rams for seamless power tilting and a user-friendly enclosed control panel.

Glass, metal and non-porous materials can be safely and easily tilted from upright to horizontal position with the Hydraulica's 90° powered tilt function. Manual 360° lockable rotation is also included as standard along with cable remote control.

## **Reference Code**

VGL63



Cable remote control as standard



Optional radio remote control

\* The capacity is 1000kg with extension arms and 14 pads fitted.








## **Technical Specifications**

| Number of suction cups  Cups: 14 10  Suction cup description: black rubber, not abrasion resistant  Suction cup diameter diameter: 330mm  Suitable for lifting material properties: surface: example: gastight / non-porous smooth glass, plastic boards, ceramic plates, sheet metals, coated boards  Weight of lifter approx: 177kg (with arms) (without arms)  Depth of lifter depth: 300mm  Rotation rotation: 360° manual left & right lockable in 90° positions  Tilt tilt: 90° powered hydraulic  Vacuum system dual circuit: 2 or 4 pumps, 2 vacuum reserve tanks  Voltage pump: battery charger: 11000kg* 750kg  14 10  1000kg* 750kg  14 10  1000kg* 750kg  120kg (with arms) (without arms)  120kg (with arms) (without arms) |  |               |  |       |
|--|--|---------------|--|-------|
| Suction cup diameter diameter: 330mm  Suitable for lifting material properties: surface: example: glass, plastic boards, ceramic plates, sheet metals, coated boards  Weight of lifter approx: 177kg (with arms) 120kg (without arms)  Depth of lifter depth: 300mm  Rotation rotation: 360° manual left & right lockable in 90° positions  Tilt tilt: 90° powered hydraulic  Vacuum system dual circuit: 2 or 4 pumps, 2 vacuum reserve tanks  Voltage pump: 12v DC from rechargeable battery battery charger: 110v/240v 50/60Hz single phase factory selectable  Standard accessories optional: 2 x curved extension arms with pads (500kg capacity), wheeled stand,   | Safe working load<br>(smooth, clean surface at 60% vacuum) | capacity:     | 1000kg*  | 750kg |
| Suction cup diameter  Suitable for lifting  material properties:     surface:     example:     glass, plastic boards, ceramic plates, sheet metals, coated boards  Weight of lifter  approx:  177kg  | Number of suction cups                                     | cups:         | 14   | 10    |
| Suitable for lifting  material properties: surface: example: glass, plastic boards, ceramic plates, sheet metals, coated boards  Weight of lifter  approx: 177kg (with arms) (without arms)  Depth of lifter  depth: 300mm  Rotation  rotation: 360° manual left & right lockable in 90° positions  Tilt  tilt: 90° powered hydraulic  Vacuum system  dual circuit: 2 or 4 pumps, 2 vacuum reserve tanks  Voltage  pump: battery charger: 12v DC from rechargeable battery 110v/240v 50/60Hz single phase factory selectable  Standard accessories  optional: 2 x curved extension arms with pads, cable remote control  Optional accessories  optional: 2 x curved extension arms with pads (500kg capacity), wheeled stand,  | Suction cup  | description:  | black rubber, not abrasion resistant               |       |
| surface: example: smooth glass, plastic boards, ceramic plates, sheet metals, coated boards  Weight of lifter approx: 177kg (with arms) 120kg (with arms)  Depth of lifter depth: 300mm  Rotation rotation: 360° manual left & right lockable in 90° positions  Tilt tilt: 90° powered hydraulic  Vacuum system dual circuit: 2 or 4 pumps, 2 vacuum reserve tanks  Voltage pump: battery charger: 12v DC from rechargeable battery battery charger: 110v/240v 50/60Hz single phase factory selectable  Standard accessories standard: 2 x extension arms with pads, cable remote control  Optional accessories optional: 2 x curved extension arms with pads (500kg capacity), wheeled stand,   | Suction cup diameter                                       | diameter:     | 330mm  |       |
| Depth of lifter depth: 300mm  Rotation rotation: 360° manual left & right lockable in 90° positions  Tilt tilt: 90° powered hydraulic  Vacuum system dual circuit: 2 or 4 pumps, 2 vacuum reserve tanks  Voltage pump: battery charger: 12v DC from rechargeable battery 110v/240v 50/60Hz single phase factory selectable  Standard accessories standard: 2 x extension arms with pads, cable remote control  Optional accessories optional: 2 x curved extension arms with pads (500kg capacity), wheeled stand,   | Suitable for lifting                                       | surface:      | smooth   |       |
| Rotation rotation: 360° manual left & right lockable in 90° positions  Tilt tilt: 90° powered hydraulic  Vacuum system dual circuit: 2 or 4 pumps, 2 vacuum reserve tanks  Voltage pump: battery charger: 12v DC from rechargeable battery 110v/240v 50/60Hz single phase factory selectable  Standard accessories standard: 2 x extension arms with pads, cable remote control  Optional accessories optional: 2 x curved extension arms with pads (500kg capacity), wheeled stand,   | Weight of lifter   | approx:       |  |       |
| Tilt tilt: 90° powered hydraulic  Vacuum system dual circuit: 2 or 4 pumps, 2 vacuum reserve tanks  Voltage pump: battery charger: 12v DC from rechargeable battery 110v/240v 50/60Hz single phase factory selectable  Standard accessories standard: 2 x extension arms with pads, cable remote control  Optional accessories optional: 2 x curved extension arms with pads (500kg capacity), wheeled stand,  | Depth of lifter  | depth:        | 300mm  |       |
| Vacuum system     dual circuit:     2 or 4 pumps, 2 vacuum reserve tanks       Voltage     pump: battery charger:     12v DC from rechargeable battery       Standard accessories     standard:     2 x extension arms with pads, cable remote control       Optional accessories     optional:     2 x curved extension arms with pads (500kg capacity), wheeled stand,   | Rotation   | rotation:     | 360° manual left & right lockable in 90° positions |       |
| Voltage  pump: battery charger: 12v DC from rechargeable battery 110v/240v 50/60Hz single phase factory selectable 2 x extension arms with pads, cable remote control 2 x curved extension arms with pads (500kg capacity), wheeled stand,   | Tilt   | tilt:         | 90° powered hydraulic                              |       |
| battery charger: 110v/240v 50/60Hz single phase factory selectable  Standard accessories standard: 2 x extension arms with pads, cable remote control  Optional accessories optional: 2 x curved extension arms with pads (500kg capacity), wheeled stand,   | Vacuum system  | dual circuit: | 2 or 4 pumps, 2 vacuum reserve tanks               |       |
| Optional accessories optional: 2 x curved extension arms with pads (500kg capacity), wheeled stand,  | Voltage  |               |  |       |
|  | Standard accessories                                       | standard:     | 2 x extension arms with pads, cable remote control |       |
|  | Optional accessories                                       | optional:     |  |       |

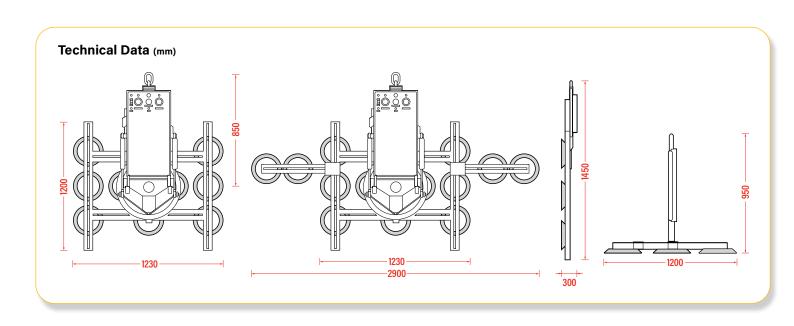

750kg capacity (10 pads)