

Cladding Lifters

Slimline & Portable Cladding Lifters

Slimline Mini-Clad [400kg]

Improving on one of our most popular cladding machines the Mini-Clad has been upgraded to the new Slimline version and the result is an even more compact profile, yet still retaining its position as the industry's most powerful 'configuration-free' cladding lifters.

Lighter and slimmer with the ability to lift up to 400kg, operators are able to complete fuss-free lifting thanks to the quad-pad suction frame. The dual-circuit vacuum system provides safe lifting of vertical wall panels up to 18m long, horizontal panels up to 8m long and roof panels up to 5m long (depending on thickness).

The Slimline Mini-Clad comes complete with manual 90° tilt and 90° left & right rotation for effortless installation, it is also compatible with GGR's range of mini spider cranes, mini crawler cranes and trailer cranes.

Key Features

- Capacity: 400kg
- Suitable for vertical wall panels up to 18m, horizontal wall panels up to 8m and roof panels up to 5m
- Dual circuit vacuum system with vacuum gauge, reserve tank and non-return valve for each circuit
- 90° manual tilt
- 90° manual left & right
- 110/240v external charger system
- Audio-visual low vacuum warning
- On-board control panel and suction release



Reference Code

VCL11

Technical Specifications

| | | |
|-------------------------------|--------------------|--|
| Safe working load | capacity: | 400kg |
| Number of suction cups | cups: | 4 within 1 x 860mm x 670mm pad |
| Maximum panel length | horizontal: | 8 metres |
| | vertical: | 18 metres |
| | roof: | 5 metres |
| | ceiling: | n/a |
| Suction cup | description: | closed cell foam seal |
| | approx dimensions: | 860mm (l) x 670mm (w) |
| Suitable for lifting | materials: | composite sandwich panels, (PUR, EPS, mineral wool). other materials possible, subject to testing. airtight, non-porous and not covered by protective film. flat smooth, MR and MMR Panels ONLY . |
| Weight | weight: | 80kg |
| Rotation | rotation: | 90° manual left & right |
| Tilt | tilt: | 90° manual |
| Vacuum system | dual circuit: | 2 pumps, 2 vacuum reserve tanks |
| Voltage | pump: | 2 x 12v (24v) DC from rechargeable batteries |
| | battery charger: | 110v/240v external charger system |
| Standard accessories | standard: | adjustable lift bail, external charger, secondary safety straps |
| Optional accessories | optional: | radio remote control |

Adding to your



Manual 90° tilt




The Slimline Mini-Clad features a low vacuum warning light and a low vacuum audio alarm.



Safety is paramount with the Slimline Mini-Clad by featuring a dual circuit vacuum system.



Features also include a panel protection plate, to keep your cladding safe while installing.

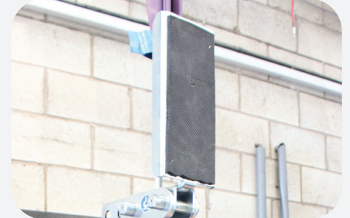

Technical Data - (approx. mm)

