

www.ggrgroup.com

STAGE V TELEHANDLER 17.40





STAGE V TELEHANDLER 17.40

(4.0t x 9.6m)



The environmentally friendly 1740 has been designed for use on construction sites and features a lifting capacity of 4000kg up to a height of 9.6m and a maximum lifting height of 16.4m.

Versatile and extremely adaptable, the 1740 benefits from a Deutz Stage V/Tier 4 engine, helping to significantly reduce carbon emissions during operations. It is also fitted with an exhaust gas after treatment system, with Diesel Oxidation Catalyst (DOC) and a Diesel Particulate Filter (DPF), this all combines to make the 1740 suitable for London's Ultra Low Emission Zone.

This telescopic telehandler also has an average hourly fuel consumption of just 3.5l/h, without the use of AdBlue, helping to create an even cleaner and greener environment during operation.

The 1740 comes with three steering options, front wheel, four-wheel and crab, enabling the operator to fit into some of the most difficult of work areas. This innovative eco-friendly telehandler includes front outriggers with side levelling technology to help stabilise the machine and provide greater control when working on rough, uneven ground and slopes.

BENEFITS OF THE GGR FARESIN TELEHANDLERS



REDUCED CONSUMPTION

Faresin telehandlers are powered by fast, ecological and efficient Stage V diesel engines, unrivalled power with a low hourly fuel consumption.



REDUCED CYCLE TIMES

The new hydraulic systems with Load Sensing technology, in conjunction with the EcoFast valves, offer high performance levels and fuel savings.



EVERYTHING UNDER CONTROL

Featuring dashboards with a machine status intuitive display. The immediate viewing of all parameters allows the operator to identify operating needs in real time.



ERGONOMICS AND VISIBILITY

The Queen Cab is equipped with an ergonomic seat, optional air conditioning, comfortable joystick, steering wheel and anti-glare glass to maximize operational efficiency and provide 360° vision.



ROBUST STEEL FRAME

The S355 robust steel frame has been fully welded by the latest manufacturing robots, ensuring the highest quality available.



EASY MAINTENANCE

The readily available and easy accessibility of components combine to make the Faresin telehandlers synonymous with efficiency and savings.



HYDROSTATIC TRANSMISSION

Featuring a single speed hydrostatic transmission, allowing a speed from 0-25 km/h, for easy manoeuvring with materials in the work area.



3 STEERING CONFIGURATIONS

With a choice of front wheel steering, four wheel steering and crab steering, the 1740 allows the operator the ability to fit into some of the most difficult of work areas.



STAGE V ENGINES: POWER AND RELIABILITY

The 1740 telehandlers are equipped with new Deutz (55.4kW) engines compliant with Stage V regulations, these modern engines are capable of ensuring excellent power and reduced fuel consumption, which helps in maximising efficiency and durability.



CLEAN & EFFICIENT

The angle of inclination of the blades is variable according to the operating temperature in order to keep low power absorption and fuel consumption.



AIR FILTER

The air filter is equipped with a dust ejector system and a cyclone pre-filter, which significantly reduce maintenance work, guaranteeing maximum efficiency.



ENGINE HOOD

The 1740 engine hood has been specifically designed to facilitate the best possible air flow, helping to ensure the lifespan of the components.




RADIATING SURFACE

Large radiating surface designed to guarantee maximum engine efficiency with even the heaviest of use and at the highest temperatures.



TECHNICAL DATA

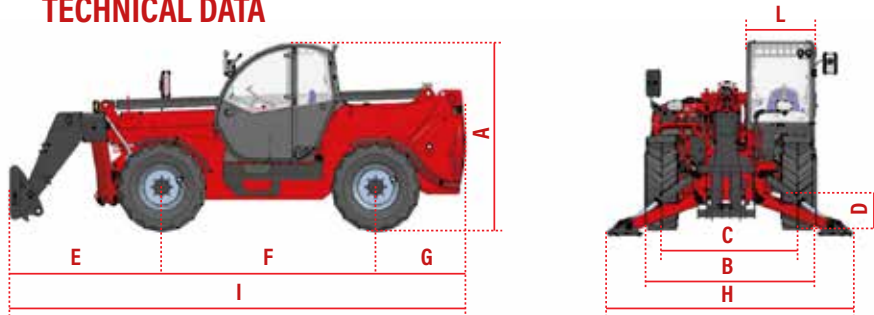

MOTOR

| | |
|-----------------------|-------------------------------|
| Engine | Deutz 55.4kW / 75.3hp Stage V |
| Transmission | Hydrostatic single gear |
| Aftertreatment system | DOC + DPF |
| Diesel tank capacity | 120 litres |




VEHICLE DATA

| | |
|------------------------------|--------------------------------------|
| Unladen weight | 11660kg |
| Maximum capacity | 4000kg |
| Maximum lifting height | 16.4m |
| Maximum working radius | 12.6m |
| Speed | 0-25km/h |
| Traction drive | all-wheels via universal joint shaft |
| Steering | four-wheels, 3 modes |
| Flow rate hydraulic services | 120 l/min @ 230 bar |
| Steering radius | 4.2m |
| Wheels | 405/70 - 20 |

DIMENSIONS (mm)

| | |
|----------------------------|------|
| (A) Height | 2500 |
| (B) Width | 2331 |
| (C) Gauge | 1862 |
| (D) Ground clearance | 280 |
| (E) Front overhang | 2330 |
| (F) Pitch | 2950 |
| (G) Rear overhang | 1240 |
| (H) Width with stabilizers | 3418 |
| (I) Length | 6520 |
| (L) Cabin width | 960 |

RATED LOADS

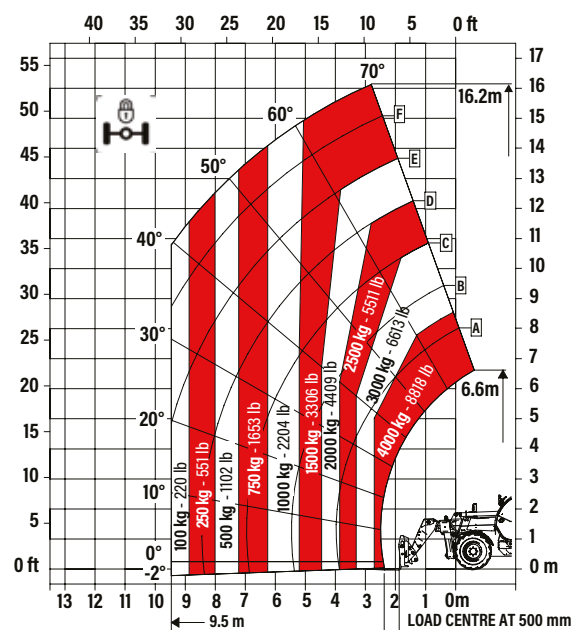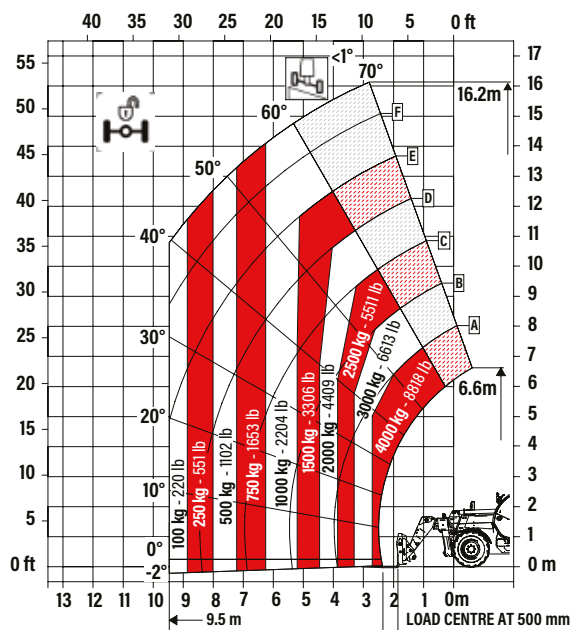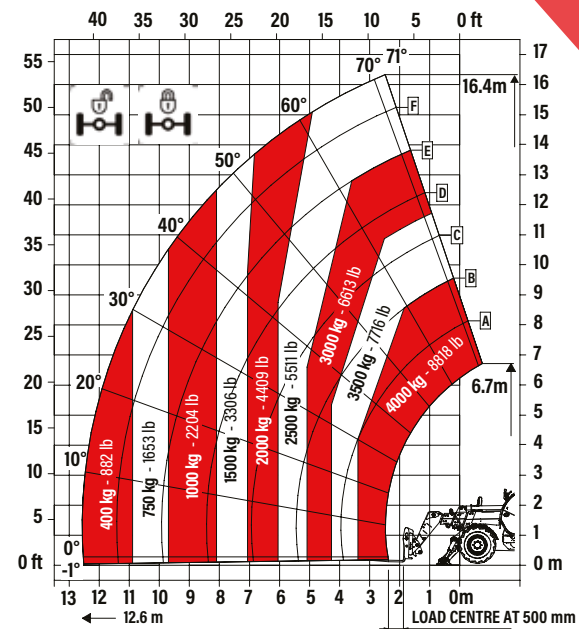




INTRODUCING FARMATICS INDUSTRY 4.0 APPLIED TECHNOLOGY

In the Research and Development applied to Industry 4.0, improving efficiency and safety standards is a fundamental step.

Faresin has introduced Farmatics, the complete solution of Hardware, eSIM, Software Application and Server Data Management, which allows you to remotely monitor the operation of telescopic handlers fitted with electronically controlled engines.

Thanks to a GPS system, the customer can:

- Geolocate the position
- Geofence the machine for added security and scheduled service alerts
- View the condition of the machine
- Control the consumption and productivity of their vehicles

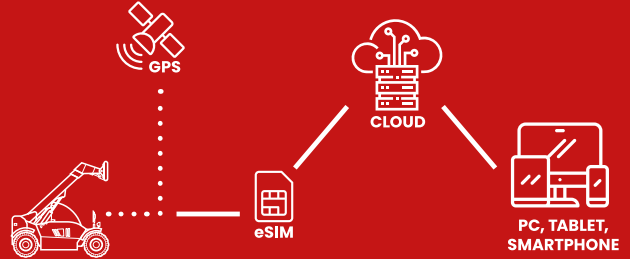

THE GGR FARESIN RANGE OF TELEHANDLERS GGR & FARESIN - INDUSTRY LEADERS WORKING TOGETHER

GGR Group are a leader in their industry offering sales and hire of specialist lifting equipment throughout the UK, supported with an expert technical team, a service department and accredited training centres nationwide. Faresin Industries, based in Breganze (Vicenza), designs, manufactures and sells worldwide feed mixer wagons and ration analysis instruments for the livestock sector and telescopic handlers for agricultural and industrial use.

Following the overwhelming success of the launch of the world's first electric telehandler to the UK market, the 6.26E. GGR and Faresin are now working together to bring the latest in Stage V and Electric technology to the UK and European continent. By working together, GGR and Faresin can provide unrivalled quality, technical prowess and solid, reputable customer service across the entire European region, with new units available on a monthly basis.



6.26E (2.6T X 4.1M)

With a lifting capacity of 2.6t, this innovative, eco-friendly telehandler is powered by a lithium battery with up to 8hrs of run time. It lends itself to a range of benefits including reduced charging times and notable savings in maintenance and running costs.



6.26 (2.6T X 4.1M)

Innovative and environmentally friendly, the 6.26 features a Stage V/Tier 4 engine ensuring excellent performance and low fuel consumption during operation. This mini telehandler also includes an exhaust gas post-treatment system with DOC+DPF, reducing emissions and carbon.



14.42 (4.2T X 10.2M)

The 14.42 features a lifting capacity of up to 4200kg at 10.2m and a maximum lifting height of 13.6m thanks to its hydraulic, three section boom. Fitted with a Deutz Stage V environmentally friendly engine, the 14.42 also includes an exhaust gas DOC+DPF after-treatment system.



17.40 (4.0T X 9.6M)

The powerful 17.40 has been designed for use on construction sites and features a lifting capacity of 4000kg up to a height of 9.6m and a maximum working height of 16.4m. Versatile and extremely adaptable, the 17.40 benefits from a Deutz Stage V engine to help reduce emissions.



“NOVATIONEM NON IMITARI”

HEAD OFFICE: GGR UNIC House, Pegasus Way, Haddenham Business Park, Haddenham, Buckinghamshire, HP17 8LJ
Telephone: +44 (0)1844 202071 Fax: +44 (0)1844 202075

UK NORTHERN DEPOT: Presentation House, Broadgate, Broadway Business Park, Oldham, OL9 0JA
Telephone: +44 (0)161 683 2580 Fax: +44 (0)161 683 4444

UK SCOTTISH DEPOT: Block 19, South Avenue, Blantyre Industrial Estate, Blantyre, Glasgow, G72 0XB
Telephone: +44 (0)1698 824 444 Fax: +44 (0)1698 824 488



www.ggrgroup.com